
MARKSMAN TO TL

Family of Basic Wrap Carton Packaging Systems





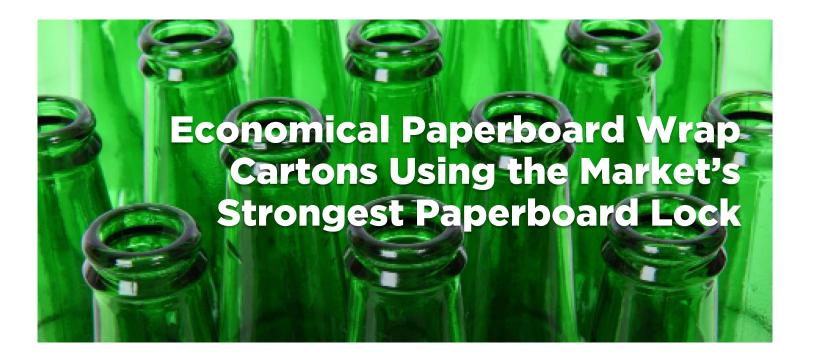

MARKSMAN ** 750 TL Cans | Bottles | PET

Similar to the Marksman™ 750, the Marksman™ TL is a wrap forming machine for moderate speeds, packaging multiple diameters and heights of cans or glass/plastic bottles in basic over the crown or neck through wraps. This machine has been lengthened to allow inclusion of the Tab-Locker folding module. This machine also includes more robust side lugs allowing speeds up to 200ppm on glass bottles.

Machine Features

Standard

- GPI standard lock
- · Dual rotary vane vacuum pump
- · Automatic oil system
- IQ Tablet
- 2,800 carton capacity magazine
- 3 arm rotary

Frame

Stainless steel frame with corrosion resistant components

Guards

 Full height, clear hinged guard doors providing easy walk-in access to the machine functions for changeover and maintenance

Optional

- Powered magazines with capacities of 5,000, 10,000 cartons
- Lock inspection w/wo pack reject
- Venturi vacuum generator
- Automatic grease system

Changeover

No-tool changeovers are quick, simple and repeatable

Time

30 minutes (format change) 45 minutes (product and format change)

Specifications

Standard Machine Elevation

41-3/8" +/- 2" (1050mm +/-50mm)

Machine Weight

Approx. 11,000 lbs (5,000 kg)

Air Requirements

80psi - 4CFM (6 bar - 7m³/h)

Electrical

400/460 VAC 50/60 Hz

Main Drive Motors

AC Gearmotor

Package Closing System

GPI Lock System Tab Locker

Ancillary Equipment

Turner / Divider / Reject Units

Primary Container Size Ranges


Bottles, glass and plastic Cans (2 piece and 3 piece) Cups, pharmaceuticals, aerosols, etc.

Diameter: 1.69" (43mm) to 2.95" (75mm) Height: 3.94" (100mm) to 11.02" (280mm)

Pack Formats

Standard: 2x2, 2x3 Optional 2x4, 2x5, 1x2, 1x3, 1x4. 1x5

MM750TL



Pack Styles

Standard: Over the crown, Neck Through, Straight Wrap

Optional: Ad-panel, full tuck adpanel, bottle guard, handle wrap, top and bottom gussets on cans

Speed / Pitches

FILCII	LIHE	<u> </u>
10"	180ppm	200ppm
(standard)		
12 1/2"	140ppm	160ppm
15"	105ppm	125ppm
*Speeds for glass bottles reduced 15%		

Machine Footprint

