
AutoClip GC1600

Innovative Can Clip System for Beverage Cans





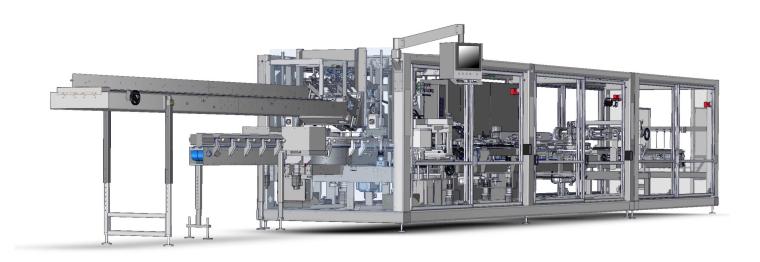

AutoClip GC1600

Based on the highly efficient product pitched Marksman™ 1600 product line, the new GripClip™ system offers a sustainable alternative to plastic can packs.

Machine Features

Standard

- Glue detection
- 10ft (3.2m) standard magazine
- Approx. 4500 carton capacity
- 10ft (3m) laned product infeed conveyor
- Segment wheel feeder
- IQ tablet with changeover checklist with videos and complete parts manual


Heavy duty welded tubular painted steel frame with corrosion resistant components

Guards

Full height, clear visibility, sliding guard doors providing easy walk-in access to the machine

Machine Options

- 15ft/4.5m extended magazine
- Approximately 9000 carton capacity
- Turner divider reject options based on the required packs, patterns and maximum speeds



NARR	OW SIDE LEAD	ING TRAY PA	TTERN
KEELCLIP DISCHARGE	TURN	DIVIDE	
2 X 2 🔀	\rightarrow	<	
2 X 3 🔐	\rightarrow	<	*****
x 4 ₩₩	J	\rightarrow	
2 X 5	\rightarrow	<	*****

Specifications

Standard Machine Elevation

43.5" +/-2" (1100mm +/- 50mm)

Machine Weight Approx. 20,000lbs (9,000kg)

Air Requirements

80psi - 28CFM (5.5 bar - 48 m3/h)

Hot melt glue

Vacuum

Venturi vacuum generator

Electrical

400/460 VAC 50/60 Hz

Main Drive Motors

Full servo drive machine

Changeover Method

No-tool repeatable changeovers. Change parts required for diameter change

Changeover Time

(Single operator-estimated) 20 minutes format change 20 minutes can height change 90 minute diameter change

Primary Container Size Ranges

2-piece beverage cans only Min diameter: 2.09" (53mm) Max diameter: 2.6" (66mm) Min height: 3.11" (79mm) Max height: 7.44" (189mm)


Carton Styles

GripClip™ carton

Pack Formats

2x2-any can 2x3—any can

2x4—any can up to 12oz/330ml



Speed / Pitches

Operates at speeds up to: Format / Line / Surge

350ppm 400ppm 330ppm 350ppm 2x3 2x4 240ppm 260ppm

Machine Footprint

