

# ***CONTINUOUS MOTION HANG TAG APPLICATORS***



**High Speed Application  
Of Neck/Hang Tags  
To Capture Consumer's  
Attention of Your Product**

# CONTINUOUS MOTION HANG TAG APPLICATORS

The Continuous Motion Hang Tag Applicators are flexible, machines customized to apply neck or hang tags to bottles off-line or in your production line.

## Machine Features


### Functional Design, Easy Access Construction

- Heavy-duty cold rolled steel frame with Melonite coating or welded stainless steel frame.
- Three construction grades to match application needs, including water resistant/wash-down.
- Clear visibility and easy-access guarding provide access to machine.

### Product & Size Ranges

- Product size dependent upon machine design.
- Hang tags: Paper, paperboard, plastic.
- Hang tag shapes: Round, rectangular, shaped.
- Single source of machine and hang tags.

### Sample tags

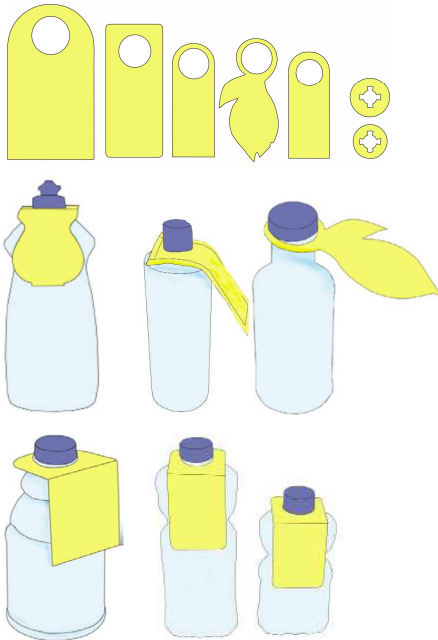

### Machine Features (Standard)

- Multiple variations to suit application.
- Various drive options for greater flexibility.
- Casters for mobility and adjustable foot pads.
- PLC controlled - brand flexibility allows flexible configurations
- HMI station.
- Drives, vacuum generators, and bearings that have been proven to be long lasting.

### Options

- Quick-change magazine and vacuum stem assemblies for quick, repeatable changeovers.
- Product positioning: Starwheels, electronic tracking and/or integrated conveyors for product control.
- Affix tag to the product with hot melt glue applicators.
- Tag folding mechanism with compression.
- Line controls to meet customer needs.
- Pass-through capability.
- Signal options: Photo eye, fixed cycle rate signal, timer to signal, encoder or customer to signal.
- Low magazine or missed item signal options.
- Light Tower Functionality: E-Stop, Run, High Discharge, or Low Infeed.
- Drive - Servo or

### Specifications

#### Speed:

- Up to 350 tags per minute.
- Speed is dependent upon product characteristics

#### Machine Models:

- Custom to suit application

#### Electrical

- Control Voltage: 24 VDC
- Supply Voltage: 120 VAC (220/460 VAC optional)

#### Air Requirements

- 80 psi clean/dry air supply required (equivalent to class 3 or better).
- CFM dependent on vacuum system specified.

